

Interpolation



Topic: Lagrangian Interpolation



Major: Electrical



What is Interpolation ?

Given $(x_0, y_0), (x_1, y_1), \dots, (x_n, y_n)$, find the value of 'y' at a value of 'x' that is not given.





Interpolants

Polynomials are the most common choice of interpolants because they are easy to:

- Evaluate
- Differentiate, and
- Integrate.



Lagrangian Interpolation

Lagrangian interpolating polynomial is given by

$$f_n(x) = \sum_{i=0}^n L_i(x) f(x_i)$$

where ‘ n ’ in $f_n(x)$ stands for the n^{th} order polynomial that approximates the function $y = f(x)$ given at $(n + 1)$ data points as $(x_0, y_0), (x_1, y_1), \dots, (x_{n-1}, y_{n-1}), (x_n, y_n)$, and


$$L_i(x) = \prod_{\substack{j=0 \\ j \neq i}}^n \frac{x - x_j}{x_i - x_j}$$

$L_i(x)$ is a weighting function that includes a product of $(n - 1)$ terms with terms of $j = i$ omitted.

Example

A manufacturer of thermistors makes the following observations on a thermistor. Determine the temperature corresponding to 754.8 ohms using the Lagrangian method for linear interpolation.

| R | T |
|--------|--------|
| Ohm | °C |
| 1101.0 | 25.113 |
| 911.3 | 30.131 |
| 636.0 | 40.120 |
| 451.1 | 50.128 |

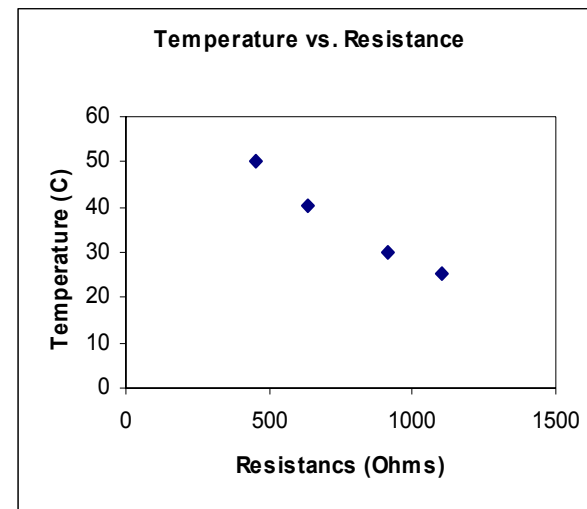


Linear Interpolation

$$T(R) = \sum_{i=0}^1 L_i(R)T(R_i)$$
$$= L_0(R)T(R_0) + L_1(R)T(R_1)$$

$$R_0 = 911.3, T(R_0) = 30.131$$

$$R_1 = 636.0, T(R_1) = 40.120$$

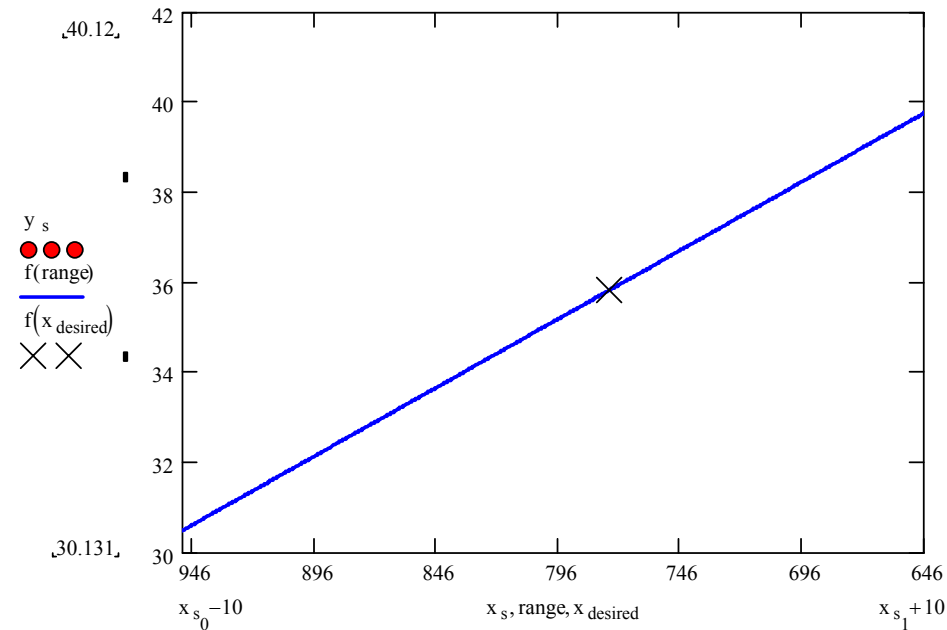



Linear Interpolation (contd)

$$L_0(R) = \prod_{\substack{j=0 \\ j \neq 0}}^1 \frac{R - R_j}{R_0 - R_j} = \frac{R - R_1}{R_0 - R_1}$$

$$L_1(R) = \prod_{\substack{j=0 \\ j \neq 1}}^1 \frac{R - R_j}{R_1 - R_j} = \frac{R - R_0}{R_1 - R_0}$$

$$T(R) = \frac{R - R_1}{R_0 - R_1} T(R_0) + \frac{R - R_0}{R_1 - R_0} T(R_1)$$

$$= \frac{R - 636.0}{911.3 - 636.0} (30.131) + \frac{R - 911.3}{636.0 - 911.3} (40.120)$$

$$T(754.8) = \frac{754.8 - 636.0}{911.3 - 636.0} (30.131) + \frac{754.8 - 911.3}{636.0 - 911.3} (40.120)$$


$$= 0.43153(30.131) + 0.56847(40.120)$$

$$= 35.809^\circ\text{C}$$

Quadratic Interpolation

For the second order polynomial interpolation (also called quadratic interpolation), we choose the temperature given by


$$\begin{aligned} T(R) &= \sum_{i=0}^2 L_i(R)T(R_i) \\ &= L_0(R)T(R_0) + L_1(R)T(R_1) + L_2(R)T(R_2) \end{aligned}$$

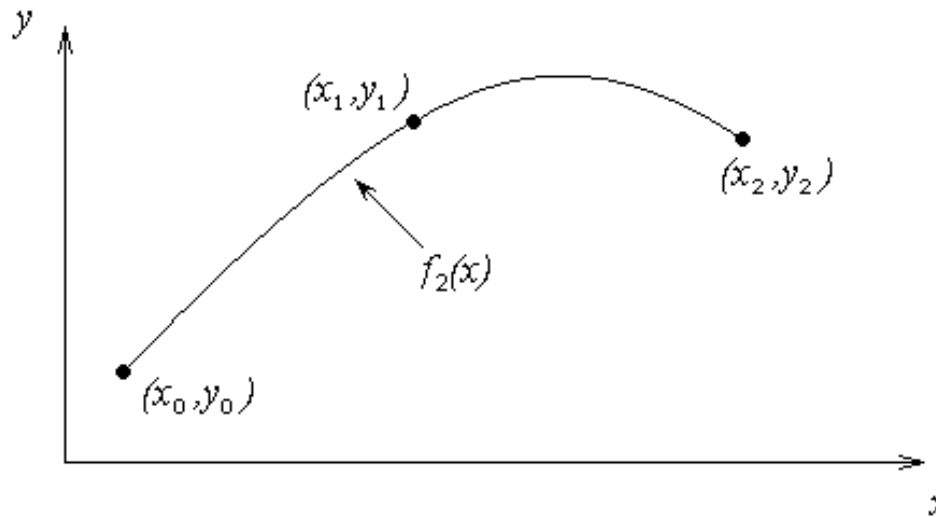

Example

A manufacturer of thermistors makes the following observations on a thermistor. Determine the temperature corresponding to 754.8 ohms using the Lagrangian method for quadratic interpolation.

| R | T |
|--------|--------|
| Ohm | °C |
| 1101.0 | 25.113 |
| 911.3 | 30.131 |
| 636.0 | 40.120 |
| 451.1 | 50.128 |

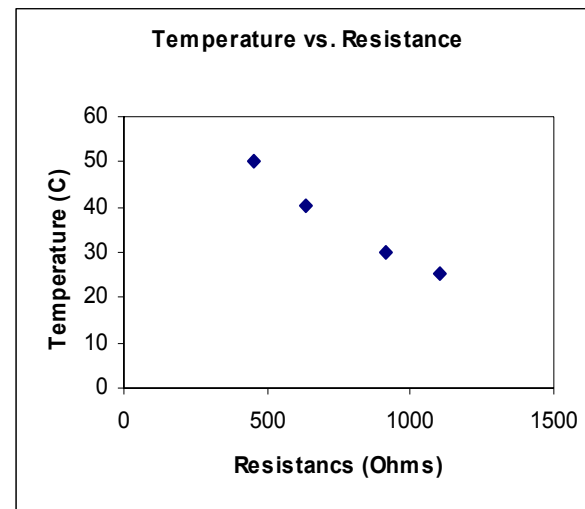

Quadratic Interpolation (contd)

$$R_0 = 911.3, \quad T(R_0) = 30.131$$


$$R_1 = 636.0, \quad T(R_1) = 40.120$$

$$R_2 = 451.1, \quad T(R_2) = 50.128$$

$$L_0(R) = \prod_{\substack{j=0 \\ j \neq 0}}^2 \frac{R - R_j}{R_0 - R_j} = \left(\frac{R - R_1}{R_0 - R_1} \right) \left(\frac{R - R_2}{R_0 - R_2} \right)$$

$$L_1(R) = \prod_{\substack{j=0 \\ j \neq 1}}^2 \frac{R - R_j}{R_1 - R_j} = \left(\frac{R - R_0}{R_1 - R_0} \right) \left(\frac{R - R_2}{R_1 - R_2} \right)$$

$$L_2(R) = \prod_{\substack{j=0 \\ j \neq 2}}^2 \frac{R - R_j}{R_2 - R_j} = \left(\frac{R - R_0}{R_2 - R_0} \right) \left(\frac{R - R_1}{R_2 - R_1} \right)$$

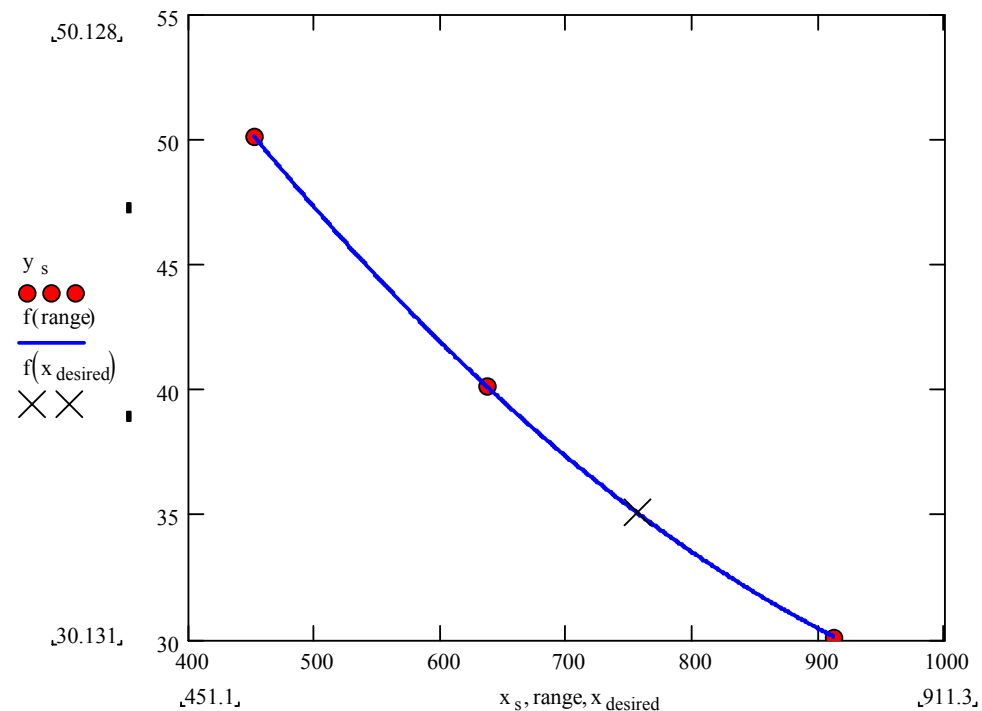



Quadratic Interpolation (contd)

$$T(R) = \left(\frac{R - R_1}{R_0 - R_1} \right) \left(\frac{R - R_2}{R_0 - R_2} \right) T(R_0) + \left(\frac{R - R_0}{R_1 - R_0} \right) \left(\frac{R - R_2}{R_1 - R_2} \right) T(R_1) + \left(\frac{R - R_0}{R_2 - R_0} \right) \left(\frac{R - R_1}{R_2 - R_1} \right) T(R_2)$$

$$T(754.8) = \frac{(754.8 - 636.0)(754.8 - 451.1)}{(911.3 - 636.0)(911.3 - 451.1)} (30.131) + \frac{(754.8 - 911.3)(754.8 - 451.1)}{(636.0 - 911.3)(636.0 - 451.1)} (40.120)$$

$$+ \frac{(754.8 - 911.3)(754.8 - 636.0)}{(451.1 - 911.3)(451.1 - 636.0)} (50.128)$$

$$= (0.28478)(30.131) + (0.93372)(40.120) + (-0.21850)(50.128)$$

$$= 35.089^\circ\text{C}$$

The absolute relative approximate error $|\epsilon_a|$ obtained between the results from the first and second order polynomial is

$$|\epsilon_a| = \left| \frac{35.089 - 35.809}{35.089} \right| \times 100$$

$$= 2.0544\%$$



Cubic Interpolation


For the third order polynomial (also called cubic interpolation), we choose the temperature given by

$$\begin{aligned} T(R) &= \sum_{i=0}^3 L_i(R)T(R_i) \\ &= L_0(R)T(R_0) + L_1(R)T(R_1) + L_2(R)T(R_2) + L_3(R)T(R_3) \end{aligned}$$

Example

A manufacturer of thermistors makes the following observations on a thermistor. Determine the temperature corresponding to 754.8 ohms using the Lagrangian method for cubic interpolation.

| R | T |
|--------|--------|
| Ohm | °C |
| 1101.0 | 25.113 |
| 911.3 | 30.131 |
| 636.0 | 40.120 |
| 451.1 | 50.128 |

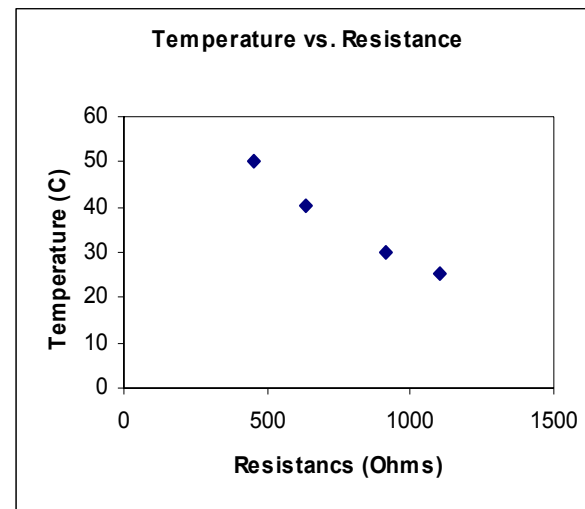

Cubic Interpolation (contd)

$$R_0 = 1101.0, T(R_0) = 25.113$$

$$R_1 = 911.3, T(R_1) = 30.131$$

$$R_2 = 636.0, T(R_2) = 40.120$$


$$R_3 = 451.1, T(R_3) = 50.128$$

$$L_0(R) = \prod_{\substack{j=0 \\ j \neq 0}}^3 \frac{R - R_j}{R_0 - R_j} = \left(\frac{R - R_1}{R_0 - R_1} \right) \left(\frac{R - R_2}{R_0 - R_2} \right) \left(\frac{R - R_3}{R_0 - R_3} \right)$$

$$L_1(R) = \prod_{\substack{j=0 \\ j \neq 1}}^3 \frac{R - R_j}{R_1 - R_j} = \left(\frac{R - R_0}{R_1 - R_0} \right) \left(\frac{R - R_2}{R_1 - R_2} \right) \left(\frac{R - R_3}{R_1 - R_3} \right)$$

$$L_2(R) = \prod_{\substack{j=0 \\ j \neq 2}}^3 \frac{R - R_j}{R_2 - R_j} = \left(\frac{R - R_0}{R_2 - R_0} \right) \left(\frac{R - R_1}{R_2 - R_1} \right) \left(\frac{R - R_3}{R_2 - R_3} \right)$$

$$L_3(R) = \prod_{\substack{j=0 \\ j \neq 3}}^3 \frac{R - R_j}{R_3 - R_j} = \left(\frac{R - R_0}{R_3 - R_0} \right) \left(\frac{R - R_1}{R_3 - R_1} \right) \left(\frac{R - R_2}{R_3 - R_2} \right)$$

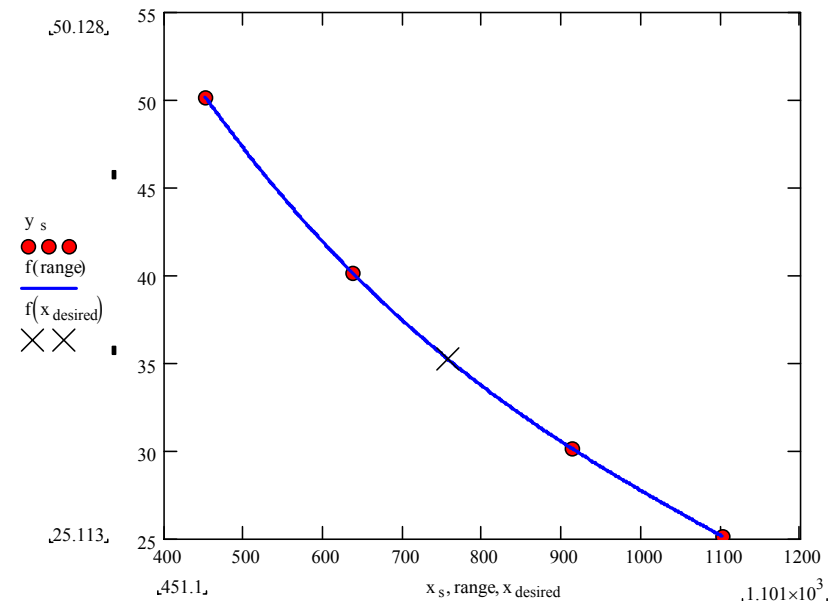



Cubic Interpolation (contd)

$$T(R) = \left(\frac{R - R_1}{R_0 - R_1} \right) \left(\frac{R - R_2}{R_0 - R_2} \right) \left(\frac{R - R_3}{R_0 - R_3} \right) T(R_0) + \left(\frac{R - R_0}{R_1 - R_0} \right) \left(\frac{R - R_2}{R_1 - R_2} \right) \left(\frac{R - R_3}{R_1 - R_3} \right) T(R_1) \\ + \left(\frac{R - R_0}{R_2 - R_0} \right) \left(\frac{R - R_1}{R_2 - R_1} \right) \left(\frac{R - R_3}{R_2 - R_3} \right) T(R_2) + \left(\frac{R - R_0}{R_3 - R_0} \right) \left(\frac{R - R_1}{R_3 - R_1} \right) \left(\frac{R - R_2}{R_3 - R_2} \right) T(R_3)$$

$$T(754.8) = \frac{(754.8 - 911.3)(754.8 - 636.0)(754.8 - 451.1)}{(1101.0 - 911.3)(1101.0 - 636.0)(1101.0 - 451.1)} (25.113) \\ + \frac{(754.8 - 1101.0)(754.8 - 636.0)(754.8 - 451.1)}{(911.3 - 1101.0)(911.3 - 636.0)(911.3 - 451.1)} (30.131) \\ + \frac{(754.8 - 1101.0)(754.8 - 911.3)(754.8 - 451.1)}{(636.0 - 1101.0)(636.0 - 911.3)(636.0 - 451.1)} (40.120) \\ + \frac{(754.8 - 1101.0)(754.8 - 911.3)(754.8 - 636.0)}{(451.1 - 1101.0)(451.1 - 911.3)(451.1 - 636.0)} (50.128) \\ = (-0.098494)(25.113) + (0.51972)(30.131) + (0.69517)(40.120) + (-0.11639)(50.128) \\ = 35.242 \text{ } ^\circ\text{C}$$



Cubic Interpolation

The absolute percentage relative approximate error, $|\epsilon_a|$ between second and third order polynomial is

$$|\epsilon_a| = \left| \frac{35.242 - 35.089}{35.242} \right| \times 100$$
$$= 0.43458\%$$



Comparison Table

| Order of Polynomial | 1 | 2 | 3 |
|--|--------|---------|----------|
| Temperature $^{\circ}C$ | 35.809 | 35.089 | 35.242 |
| Absolute Relative Approximate Error | ----- | 2.0544% | 0.43458% |



Actual Calibration

The actual calibration curve used by industry is given by

$$\frac{1}{T} = \sum_{i=0}^3 L_i(\ln R) \frac{1}{T(\ln R_i)} = L_0(\ln R) \frac{1}{T(\ln R_0)} + L_1(\ln R) \frac{1}{T(\ln R_1)} + L_2(\ln R) \frac{1}{T(\ln R_2)} + L_3(\ln R) \frac{1}{T(\ln R_3)}$$

substituting $y = \frac{1}{T}$, and $x = \ln R$, the calibration curve is given by

$$y(x) = L_0(x)y(x_0) + L_1(x)y(x_1) + L_2(x)y(x_2) + L_3(x)y(x_3)$$

Find the calibration curve and find the temperature corresponding to 754.8 ohms. What is the difference between the results from cubic interpolation? In which method is the difference larger, if the actual measured value at 754.8 ohms is 35.285°C ?

| R | T | x | y |
|--------|--------|--------|---------------|
| Ohm | °C | ln R | $\frac{1}{T}$ |
| 1101.0 | 25.113 | 7.0040 | 0.039820 |
| 911.3 | 30.131 | 6.8149 | 0.033188 |
| 636.0 | 40.120 | 6.4552 | 0.024925 |
| 451.1 | 50.128 | 6.1117 | 0.019949 |



Actual Calibration

$$y(x) = L_0(x)y(x_0) + L_1(x)y(x_1) + L_2(x)y(x_2) + L_3(x)y(x_3)$$

$$x_0 = 7.0040, \quad y(x_0) = 0.039820$$

$$x_1 = 6.8149, \quad y(x_1) = 0.033188$$

$$x_2 = 6.4552, \quad y(x_2) = 0.024925$$

$$x_3 = 6.1117, \quad y(x_3) = 0.019949$$

$$L_0(x) = \prod_{\substack{j=0 \\ j \neq 0}}^3 \frac{x - x_j}{x_0 - x_j} = \left(\frac{x - x_1}{x_0 - x_1} \right) \left(\frac{x - x_2}{x_0 - x_2} \right) \left(\frac{x - x_3}{x_0 - x_3} \right)$$

$$L_1(x) = \prod_{\substack{j=0 \\ j \neq 1}}^3 \frac{x - x_j}{x_1 - x_j} = \left(\frac{x - x_0}{x_1 - x_0} \right) \left(\frac{x - x_2}{x_1 - x_2} \right) \left(\frac{x - x_3}{x_1 - x_3} \right)$$

$$L_2(x) = \prod_{\substack{j=0 \\ j \neq 2}}^3 \frac{x - x_j}{x_2 - x_j} = \left(\frac{x - x_0}{x_2 - x_0} \right) \left(\frac{x - x_1}{x_2 - x_1} \right) \left(\frac{x - x_3}{x_2 - x_3} \right)$$

$$L_3(x) = \prod_{\substack{j=0 \\ j \neq 3}}^3 \frac{x - x_j}{x_3 - x_j} = \left(\frac{x - x_0}{x_3 - x_0} \right) \left(\frac{x - x_1}{x_3 - x_1} \right) \left(\frac{x - x_2}{x_3 - x_2} \right)$$



Actual Calibration

$$y(x) = \left(\frac{x-x_1}{x_0-x_1} \right) \left(\frac{x-x_2}{x_0-x_2} \right) \left(\frac{x-x_3}{x_0-x_3} \right) y(x_0) + \left(\frac{x-x_0}{x_1-x_0} \right) \left(\frac{x-x_2}{x_1-x_2} \right) \left(\frac{x-x_3}{x_1-x_3} \right) y(x_1) \\ + \left(\frac{x-x_0}{x_2-x_0} \right) \left(\frac{x-x_1}{x_2-x_1} \right) \left(\frac{x-x_3}{x_2-x_3} \right) y(x_2) + \left(\frac{x-x_0}{x_3-x_0} \right) \left(\frac{x-x_1}{x_3-x_1} \right) \left(\frac{x-x_2}{x_3-x_2} \right) y(x_3)$$

$$x = \ln 754.8 = 6.6265$$

$$y(6.6265) = \frac{(6.6265 - 6.8149)(6.6265 - 6.4552)(6.6265 - 6.1117)}{(7.0040 - 6.8149)(7.0040 - 6.4552)(7.0040 - 6.1117)} (0.039820) \\ + \frac{(6.6265 - 7.0040)(6.6265 - 6.4552)(6.6265 - 6.1117)}{(6.8149 - 7.0040)(6.8149 - 6.4552)(6.8149 - 6.1117)} (0.033188) \\ + \frac{(6.6265 - 7.0040)(6.6265 - 6.8149)(6.6265 - 6.1117)}{(6.4552 - 7.0040)(6.4552 - 6.8149)(6.4552 - 6.1117)} (0.024925) \\ + \frac{(6.6265 - 7.0040)(6.6265 - 6.8149)(6.6265 - 6.4552)}{(6.1117 - 7.0040)(6.1117 - 6.8149)(6.1117 - 6.4552)} (0.019949) \\ = (-0.17942)(0.039820) + (0.69599)(0.033188) \\ + (0.53995)(0.024925) + (-0.056525)(0.019949) \\ = 0.028285$$



Actual Calibration

$$\begin{aligned}\text{Finally, since } y &= \frac{1}{T}, \quad T = \frac{1}{y} = \frac{1}{0.028285} \\ &= 35.355^\circ\text{C}\end{aligned}$$

Since the actual measured value at 754.8 ohms is 35.285°C , the absolute relative true error between the value used for part (a) is

$$\begin{aligned}|\epsilon_t| &= \left| \frac{35.285 - 35.242}{35.285} \right| \times 100 \\ &= 0.12186\%\end{aligned}$$

and for part (b) is

$$\begin{aligned}|\epsilon_t| &= \left| \frac{35.285 - 35.355}{35.285} \right| \times 100 \\ &= 0.19838\%\end{aligned}$$

Therefore, a cubic polynomial interpolant given by Lagrangian method obtained more accurate results than the calibration curve.