




Differentiation-Discrete Functions



Major: Civil Engineering

Authors: Autar Kaw, Sri Harsha Garapati



Forward Difference Approximation

$$f'(x) = \lim_{\Delta x \rightarrow 0} \frac{f(x + \Delta x) - f(x)}{\Delta x}$$

For a finite ' Δx '

$$f'(x) \cong \frac{f(x + \Delta x) - f(x)}{\Delta x}$$

Graphical Representation Of Forward Difference Approximation

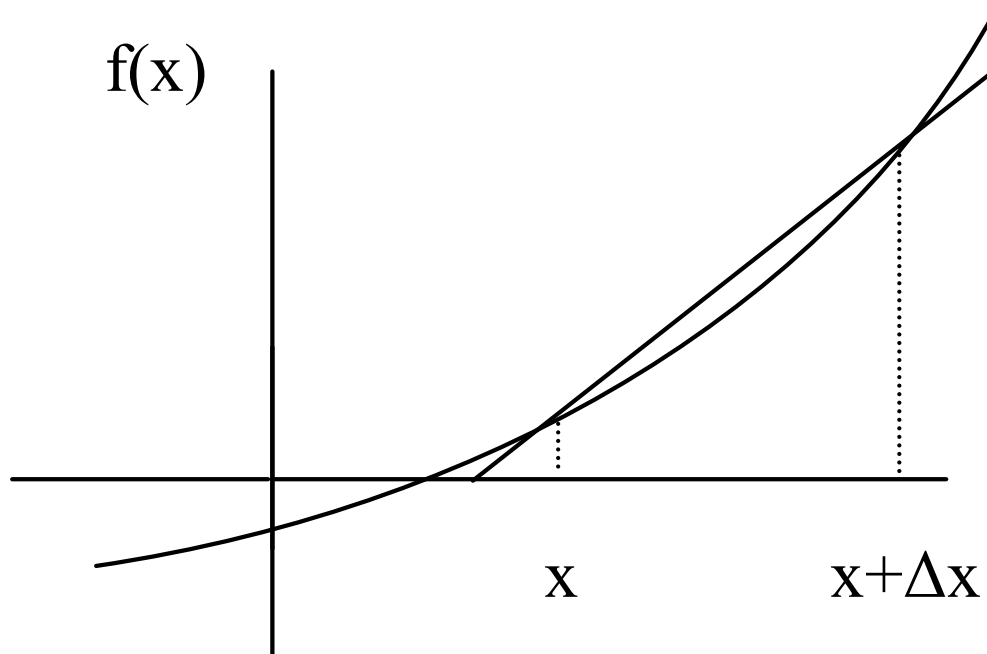


Figure 1: Graphical Representation of forward difference approximation of first derivative



Example 1

To find the stress concentration around a hole in a plate under a uniform stress, a finite difference program has been written that calculates the radial and tangential displacements at different points in the plate. To find the stresses and hence the stress concentration factor, one needs to find the derivatives of these displacements. Below are given the radial displacements, u along the y -axes.

a) At $x = 0$ if the radial strain, ε_r is given by $\varepsilon_r = \frac{\partial u}{\partial r}$, find the radial strain at $r = 1.1\text{cm}$ using forward divided difference method.

b) If the tangential strain at $r = 1.1\text{cm}, \theta = 90^\circ$ is given to you as

$\varepsilon_\theta = 0.0029733$, find the hoop stress, σ_θ , at $r = 1.1\text{cm}, \theta = 90^\circ$

$$\text{if } \sigma_\theta = \frac{E}{1-\nu^2}(\varepsilon_r + \nu\varepsilon_\theta)$$



Example 1 Cont.

$r(cm)$	$u(cm)$
1.0	-0.0010000
1.1	-0.0010689
1.2	-0.0011088
1.3	-0.0011326
1.4	-0.0011474
1.5	-0.0011574
1.6	-0.0011650
1.7	-0.0011718
1.8	-0.0011785
1.9	-0.0011857



Example 1 Cont.

Solution:

$$a) \quad \varepsilon_r \cong \frac{u_{i+1} - u_i}{\Delta r}$$

$$r_i = 1.1cm$$

$$r_{i+1} = 1.2cm$$

$$\begin{aligned} \Delta r &= r_{i+1} - r_i \\ &= 1.2 - 1.1 \\ &= 0.1cm \end{aligned}$$

$$u_{i+1} = -0.0011088cm$$

$$u_i = -0.0010689cm$$



Example 1 Cont.

$$\begin{aligned}\varepsilon_r &= \frac{u_{i+1} - u_i}{\Delta r} \\ &= \frac{-0.0011088 - (-0.0010689)}{0.1} \\ &= -0.00039900 \text{ cm / cm}\end{aligned}$$

b)

$$\begin{aligned}\sigma_\theta &= \frac{E}{1-\nu^2} (\varepsilon_r + \nu\varepsilon_\theta) \\ &= \frac{2 \times 10^{11}}{1-0.3^2} (-0.00039900 + 0.3 \times 0.0029733) \\ &= 108.35 \times 10^6 \text{ Pa}\end{aligned}$$



Direct Fit Polynomials

In this method, given ' $n+1$ ' data points $(x_0, y_0), (x_1, y_1), (x_2, y_2), \dots, (x_n, y_n)$

, one can fit a n^{th} order polynomial given by

$$P_n(x) = a_0 + a_1x + \dots + a_{n-1}x^{n-1} + a_nx^n$$

To find the first derivative,

$$P'_n(x) = \frac{dP_n(x)}{dx} = a_1 + 2a_2x + \dots + (n-1)a_{n-1}x^{n-2} + na_nx^{n-1}$$

Similarly other derivatives can be found.



Example 2-Direct Fit Polynomials

To find the stress concentration around a hole in a plate under a uniform stress, a finite difference program has been written that calculates the radial and tangential displacements at different points in the plate. To find the stresses and hence the stress concentration factor, one needs to find the derivatives of these displacements. Below are given the radial displacements, u along the y-axes.

a) At $x = 0$ if the radial strain, ε_r is given by $\varepsilon_r = \frac{\partial u}{\partial r}$, find the radial strain at $r = 1.1\text{cm}$ using third order polynomial interpolant.

b) If the tangential strain at $r = 1.1\text{cm}, \theta = 90^\circ$ is given to you as

$\varepsilon_\theta = 0.0029733$, find the hoop stress, σ_θ , at $r = 1.1\text{cm}, \theta = 90^\circ$

$$\text{if } \sigma_\theta = \frac{E}{1-\nu^2}(\varepsilon_r + \nu\varepsilon_\theta)$$



Example 2-Direct Fit Polynomials cont.

$r(cm)$	$u(cm)$
1.0	-0.0010000
1.1	-0.0010689
1.2	-0.0011088
1.3	-0.0011326
1.4	-0.0011474
1.5	-0.0011574
1.6	-0.0011650
1.7	-0.0011718
1.8	-0.0011785
1.9	-0.0011857



Example 2-Direct Fit Polynomials cont.

For the third order polynomial (also called cubic interpolation), we choose the velocity given by

$$u(r) = a_0 + a_1r + a_2r^2 + a_3r^3$$

Since we want to find the radial strain at $r=1.1$ cm, and we are using a third order polynomial, we need to choose the four points closest to $r = 1.1$ and that also bracket $r = 1.1$ to evaluate it.

The four points are $r_0 = 1.0, r_1 = 1.1, r_2 = 1.2$ and $r_3 = 1.3$

$$r_0 = 1.0, \quad u(r_0) = -0.0010000$$

$$r_1 = 1.1, \quad u(r_1) = -0.0010689$$

$$r_2 = 1.2, \quad u(r_2) = -0.0011088$$

$$r_3 = 1.3, \quad u(r_3) = -0.0011326$$

Example 2-Direct Fit Polynomials cont.

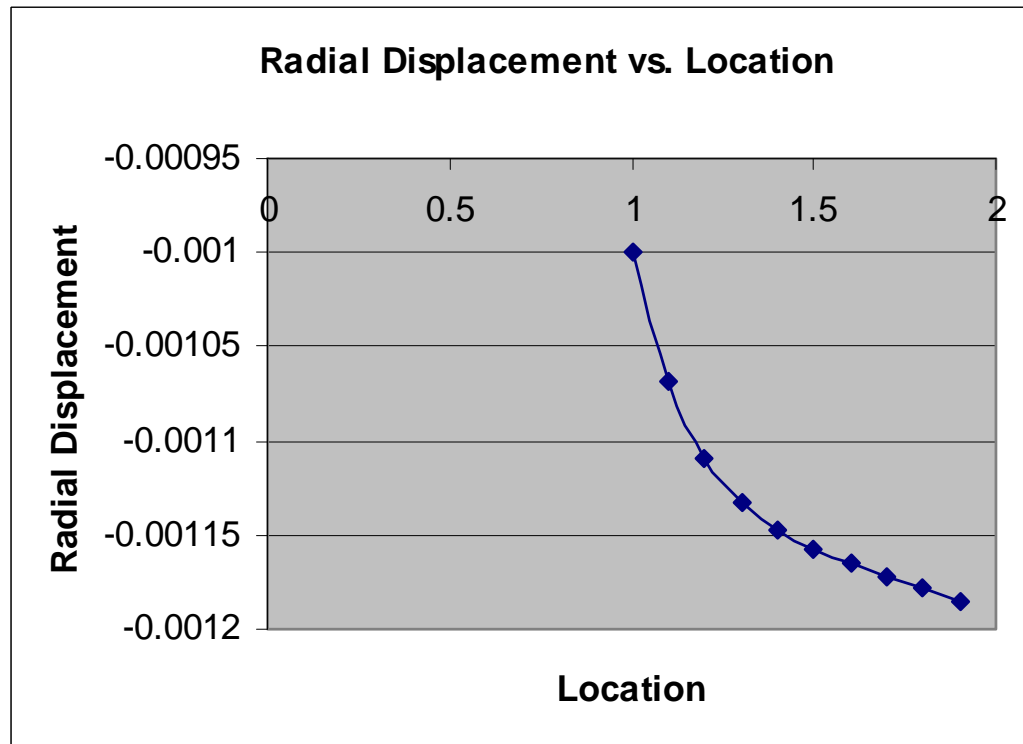


Figure 1: Graph of Radial Displacement vs. Location



Example 2-Direct Fit Polynomials cont.

such that

$$u(1.0) = -0.0010000 = a_0 + a_1(1) + a_2(1)^2 + a_3(1)^3$$

$$u(1.1) = -0.0010689 = a_0 + a_1(1.1) + a_2(1.1)^2 + a_3(1.1)^3$$

$$u(1.2) = -0.0011088 = a_0 + a_1(1.2) + a_2(1.2)^2 + a_3(1.2)^3$$

$$u(1.3) = -0.0011326 = a_0 + a_1(1.3) + a_2(1.3)^2 + a_3(1.3)^3$$

Writing the four equations in matrix form, we have



Example 2-Direct Fit Polynomials cont.

$$\begin{bmatrix} 1 & 1 & 1 & 1 \\ 1 & 1.1 & 1.21 & 1.331 \\ 1 & 1.2 & 1.44 & 1.728 \\ 1 & 1.3 & 1.69 & 2.197 \end{bmatrix} \begin{bmatrix} a_0 \\ a_1 \\ a_2 \\ a_3 \end{bmatrix} = \begin{bmatrix} -0.0010000 \\ -0.0010689 \\ -0.0011088 \\ -0.0011326 \end{bmatrix}$$

Solving the above four equations gives

$$a_0 = 0.0041220$$

$$a_1 = -0.0011517$$

$$a_2 = 0.0085450$$

$$a_3 = -0.0021500$$



Example 2-Direct Fit Polynomials cont.

Hence

$$\begin{aligned}u(r) &= a_0 + a_1 r + a_2 r^2 + a_3 r^3 \\ &= 0.0041220 - 0.0011517r + 0.0085450r^2 - 0.0021500r^3, \quad 1 \leq r \leq 1.3\end{aligned}$$

The derivative of radial displacement at $r=1.1\text{cm}$ is given by

$$u'(1.1) = \left. \frac{d}{dr} u(r) \right|_{r=1.1}$$

Given that

$$u(r) = 0.0041220 - 0.0011517r + 0.0085450r^2 - 0.0021500r^3, \quad 1 \leq r \leq 1.3$$

$$u'(r) = \frac{d}{dr} u(r)$$



Example 2-Direct Fit Polynomials cont.

$$\begin{aligned} &= \frac{d}{dr} (0.0041220 - 0.0011517r + 0.0085450r^2 - 0.0021500r^3) \\ &= -0.0011517 + 0.017090 r - 0.0064500 r^2, \quad 1 \leq r \leq 1.3 \end{aligned}$$

$$\begin{aligned} u'(1.1) &= -0.0011517 + 0.017090(1.1) - 0.0064500(1.1)^2 \\ &= -0.00052250 \text{ cm/cm} \end{aligned}$$

But $\varepsilon_r = \frac{\partial u}{\partial r}$

$$\varepsilon_r = 0.00052250 \text{ cm / cm}$$



Example 2-Direct Fit Polynomials cont.

b)

$$\begin{aligned}\sigma_{\theta} &= \frac{E}{1-\nu^2} (\varepsilon_r + \nu\varepsilon_{\theta}) \\ &= \frac{2 \times 10^{11}}{1-0.3^2} (-0.00052250 + 0.3 \times 0.0029733) \\ &= 81.206 \times 10^6 \text{ Pa}\end{aligned}$$



Lagrange Polynomial

In this method, given $(x_1, y_1), \dots, (x_n, y_n)$, one can fit a $(n-1)^{th}$ order Lagrangian polynomial given by

$$f_n(x) = \sum_{i=0}^n L_i(x) f(x_i)$$

where 'n' in $f_n(x)$ stands for the n^{th} order polynomial that approximates the function $y = f(x)$ given at $(n+1)$ data points as $(x_0, y_0), (x_1, y_1), \dots, (x_{n-1}, y_{n-1}), (x_n, y_n)$, and

$$L_i(x) = \prod_{\substack{j=0 \\ j \neq i}}^n \frac{x - x_j}{x_i - x_j}$$

$L_i(x)$ a weighting function that includes a product of $(n-1)$ terms with terms of $j = i$ omitted.



Lagrange Polynomial Cont.

Then to find the first derivative, one can differentiate $f_n(x)$ once, and so on for other derivatives.

For example, the second order Lagrange polynomial passing through

$(x_0, y_0), (x_1, y_1), (x_2, y_2)$ is

$$f_2(x) = \frac{(x-x_1)(x-x_2)}{(x_0-x_1)(x_0-x_2)} f(x_0) + \frac{(x-x_0)(x-x_2)}{(x_1-x_0)(x_1-x_2)} f(x_1) + \frac{(x-x_0)(x-x_1)}{(x_2-x_0)(x_2-x_1)} f(x_2)$$

Differentiating equation (2) gives



Lagrange Polynomial Cont.

$$f_2'(x) = \frac{2x - (x_1 + x_2)}{(x_0 - x_1)(x_0 - x_2)} f(x_0) + \frac{2x - (x_0 + x_2)}{(x_1 - x_0)(x_1 - x_2)} f(x_1) + \frac{2x - (x_0 + x_1)}{(x_2 - x_0)(x_2 - x_1)} f(x_2)$$

Differentiating again would give the second derivative as

$$f_2''(x) = \frac{2}{(x_0 - x_1)(x_0 - x_2)} f(x_0) + \frac{2}{(x_1 - x_0)(x_1 - x_2)} f(x_1) + \frac{2}{(x_2 - x_0)(x_2 - x_1)} f(x_2)$$



Example 3

To find the stress concentration around a hole in a plate under a uniform stress, a finite difference program has been written that calculates the radial and tangential displacements at different points in the plate. To find the stresses and hence the stress concentration factor, one needs to find the derivatives of these displacements. Below are given the radial displacements, u along the y-axes.

a) At $x = 0$ if the radial strain, ε_r is given by $\varepsilon_r = \frac{\partial u}{\partial r}$, find the radial strain at $r = 1.1\text{cm}$ using lagrange ploynomial interpolant.

b) If the tangential strain at $r = 1.1\text{cm}, \theta = 90^\circ$ is given to you as

$\varepsilon_\theta = 0.0029733$, find the hoop stress, σ_θ , at $r = 1.1\text{cm}, \theta = 90^\circ$

$$\text{if } \sigma_\theta = \frac{E}{1-\nu^2}(\varepsilon_r + \nu\varepsilon_\theta)$$



Example 3 Cont.

$r(cm)$	$u(cm)$
1.0	-0.0010000
1.1	-0.0010689
1.2	-0.0011088
1.3	-0.0011326
1.4	-0.0011474
1.5	-0.0011574
1.6	-0.0011650
1.7	-0.0011718
1.8	-0.0011785
1.9	-0.0011857



Example 3 Cont.

Solution:

$$u(r) = \left(\frac{r - r_1}{r_0 - r_1} \right) \left(\frac{r - r_2}{r_0 - r_2} \right) u(r_0) + \left(\frac{r - r_0}{r_1 - r_0} \right) \left(\frac{r - r_2}{r_1 - r_2} \right) u(r_1) + \left(\frac{r - r_0}{r_2 - r_0} \right) \left(\frac{r - r_1}{r_2 - r_1} \right) u(r_2)$$

$$u'(r) = \frac{2r - (r_1 + r_2)}{(r_0 - r_1)(r_0 - r_2)} u(r_0) + \frac{2r - (r_0 + r_2)}{(r_1 - r_0)(r_1 - r_2)} u(r_1) + \frac{2r - (r_0 + r_1)}{(r_2 - r_0)(r_2 - r_1)} u(r_2)$$

$$u'(1.1) = \frac{2(1.1) - (1.2 + 1.3)}{(1 - 1.2)(1 - 1.3)} (-0.0010000) + \frac{2(1.1) - (1 + 1.3)}{(1.2 - 1)(1.2 - 1.3)} (-0.0011088) \\ + \frac{2(1.1) - (1 + 1.2)}{(1.3 - 1)(1.3 - 1.2)} (-0.0011326)$$



Example 3 Cont.

$$\begin{aligned} &= -5(-0.0010000) + 5(-0.0011088) + 0(-0.0011326) \\ &= -0.00054400 \text{ cm/cm} \end{aligned}$$

b)

$$\begin{aligned} \sigma_{\theta} &= \frac{E}{1-\nu^2} (\varepsilon_r + \nu \varepsilon_{\theta}) \\ &= \frac{2 \times 10^{11}}{1-0.3^2} (-0.00054400 + 0.3 \times 0.0029733) \\ &= 76.481 \times 10^6 \text{ Pa} \end{aligned}$$